




UNDER REVIEW

URF 19-1128 19.10.30 (VM)

REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVED
—	—	—	—	—

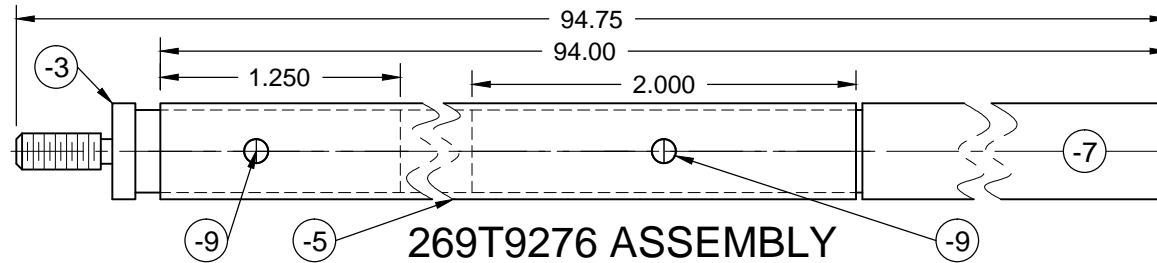

CUSTOMER
INSTALLED

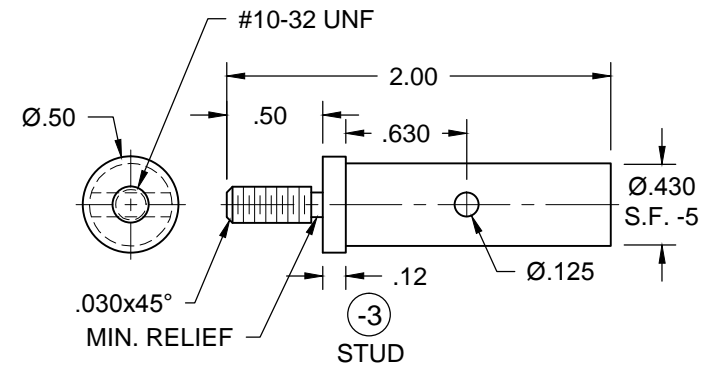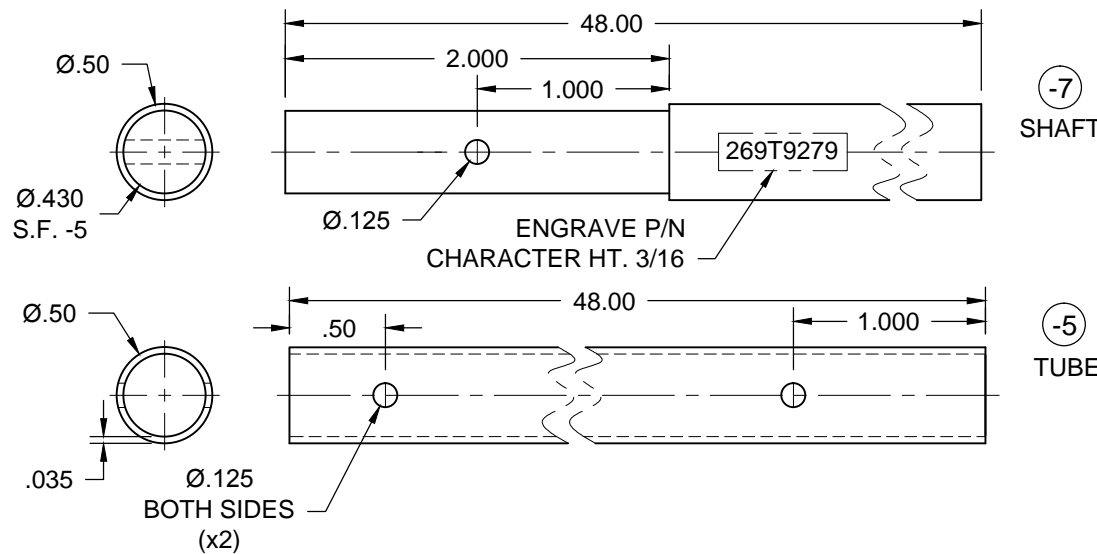

NOTES

1. BLACK ANODIZE -5 TUBE & -7 SHAFT.
2. BLACK OXIDE -3 STUD.

ASSY QTY	ASSY QTY	B/O	PART #	TOTAL QTY	DESCRIPTION	MAT.	B/O INFORMATION SPECIFICATIONS OR
			-3	1	STUD	RND. BAR	1018 Ø1/2 x 2
			-5	1	TUBE	ALUMINUM TUBING	Ø1/2 OD. x .035 wall x 48
			-7	1	SHAFT	RND. BAR	6061 Ø1/2 x 48
			-9	2	ROLL PIN	STEEL	Ø1/8 x 1/2
ASSY #							

RED BARN MACHINE	
TITLE	INSTALLATION ROD; TAIL ROTOR DRIVE SHAFT DAMPER
DWG NO.	269T9276
REV	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY: PERRITT
TOLERANCES ON: DECIMALS .XXX ± .005 .XX ± .01 .X ± .1	APPROVED
FRACTIONS ± 1/32 ANGLES ± 5°	HEAT TREAT FINISH SPEC
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	USED ON MODEL
SCALE NTS	DATE 11-13-07
SHEET 1 of 1	

